


# Especificaciones de Cartoncillo Recubierto Reverso Café

Triple Fourdrinier

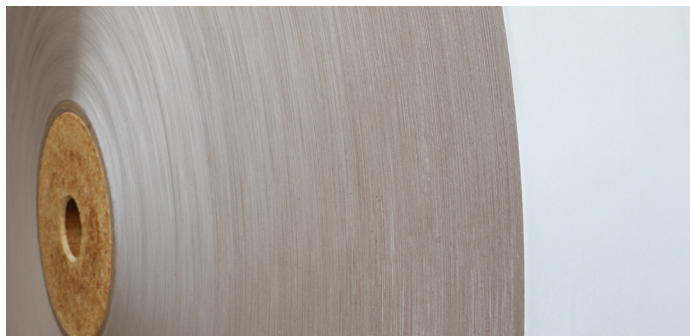

## Producto: Cartoncillo Recubierto Reverso Café


<b>Calibre</b>	1x10-3 in	<b>11</b>	<b>12</b>	<b>14</b>	<b>16</b>	<b>18</b>	<b>20</b>	<b>22</b>	<b>24</b>	<b>26</b>	<b>28</b>	+/- 1	T-411
<b>Peso Base</b>	g/m2	245	255	285	325	360	395	430	465	510	535	+/- 5%	T-410
<b>Rigidez L&amp;W 15° DM</b>	mNm	21	23	38	58	78	108	140	180	200	230	+/- 15%	T-556
<b>Rigidez L&amp;W 15° CM</b>	mNm	10	11	19	27	40	52	67	85	97	106	+/- 15%	T-556

<b>Humedad</b>	%	6	+/- 1	T-412
<b>Bond</b>	lbs/in2	90	Mínimo	T-541
<b>Blancura (cara)</b>	GE	78	+/- 1	T-452
<b>Lisura (cara)</b>	u.S.	150	Máximo	T-538
<b>IGT (clay-pick)</b>	m/seg.	2.5	Mínimo	T-514
<b>IGT (blister)</b>	m/seg.	2.5	Mínimo	T-514
<b>Parker Print-Surf</b>	µm	2	Máximo	T-555



# Specifications Clay Coated Kraft Back

## Triple Fourdrinier

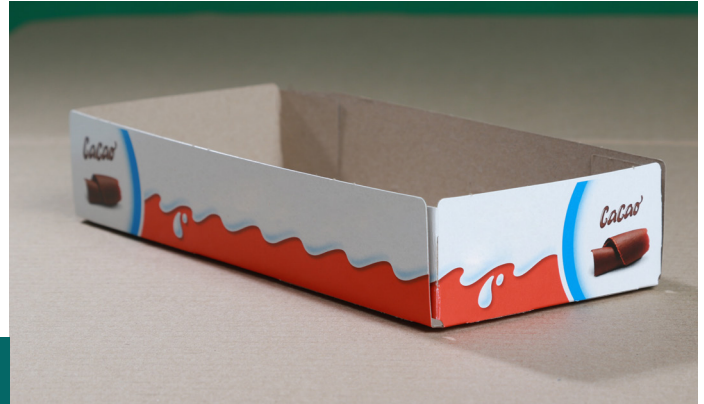

**Product: Clay Coated Kraft Back**

<b>Caliper</b>	1x10-3 in	<b>11</b>	<b>12</b>	<b>14</b>	<b>16</b>	<b>18</b>	<b>20</b>	<b>22</b>	<b>24</b>	<b>26</b>	<b>28</b>	+/- 1	T-411
<b>Basis Weight</b>	g/m2	245	255	285	325	360	395	430	465	510	535	+/- 5%	T-410
<b>Stiffness L&amp;W 15° DM</b>	mNm	21	23	38	58	78	108	140	180	200	230	+/- 15%	T-556
<b>Stiffness L&amp;W 15° CM</b>	mNm	10	11	19	27	40	52	67	85	97	106	+/- 15%	T-556

<b>Moisture</b>	%	6	+/- 1	T-412
<b>Ply Bond</b>	lbs/in2	90	Minimum	T-541
<b>Brightness (Top)</b>	GE	78	+/- 1	T-452
<b>Sheffield Smoothness (Top)</b>	u.S.	150	Maximum	T-538
<b>IGT (clay-pick)</b>	m/seg.	2.5	Minimum	T-514
<b>IGT (blister)</b>	m/seg.	2.5	Minimum	T-514
<b>Parker Print-Surf</b>	µm	2	Maximum	T-555

